

AYRLITE® 2061

Decorative Faced, Aluminium Honeycomb Panel



AYRES
Lightweight Panel Systems
www.ayrescom.com

DATA SHEET Issue 2

Description

AYRLITE 2061 is an aluminium honeycomb panel faced with decorative HPL laminate.

Panels are produced with the same colour/finish laminate to both faces to ensure panel flatness.

AYRLITE 2061 is specifically designed to provide a lightweight panel with high stiffness and strength for the interior fit out of private marine craft.

Strain-hardened hexagonal cell aluminium honeycomb has optimum mechanical properties and is able to carry shear loads at significantly lower weight than foams or other core types.

Features



- Laminate meets IMO SOLAS test Res.A.653(16) Low Flame Spread.
- Meets ISO 1182 for Non-Combustibility of aluminium honeycomb core.
- 6.35mm cell size, aluminium honeycomb core.
- Aluminium honeycomb core meets the requirements of MIL-C-7438 salt fog anti-corrosion performance.
- Hot bonded adhesive process.
- Range of decorative finishes available.
- High stiffness and strength.
- Low weight.
- Easy to fabricate.
- Wide selection of anodised aluminium assembly extrusions available.

Applications

- Wall linings.
- Doors.

- Tables.
- Furniture.
- Partitions.
- Cabinetry.
- Internal modules eg. galleys, toilets, etc.
- Ceilings.
- Bulkheads.


Fabrication

AYRLITE 2061 can be easily cut and drilled with standard tools, such as circular saws, routers etc. Components or complete interiors can be fabricated using Ayres Composite Panels' aluminium extrusions, cutters and polyurethane paste adhesives. Traditional tongue-and-groove (mortice and tenon) methods can also be used.

A DVD is available, showing assembly techniques contact Ayres Composite Panels for a copy.

Storage

NOTE: Unbalanced exposure of the panel faces to ambient moisture levels during transport and storage can induce bow in some panels; typically the top and/or bottom panel of a pack. To restore moisture balance and flatness, simply expose the concave face to the atmosphere overnight.

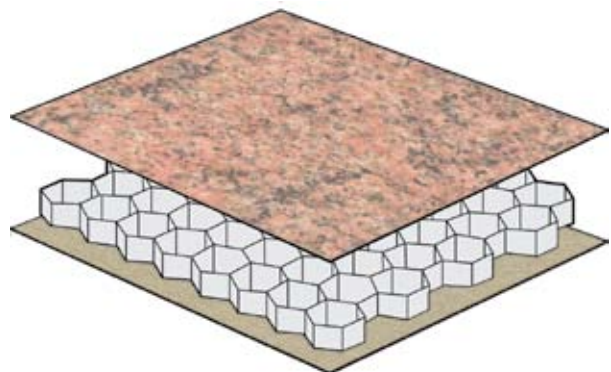

AYRLITE® 2061

Decorative Faced, Aluminium Honeycomb Panel



AYRES

Lightweight Panel Systems
www.ayrescom.com

Physical and Mechanical Performance

Typical room temperature properties for 1mm decorative laminate faced panels.

Thickness (mm)	Weight (Kg/m ²)	Long Beam		Flatwise Tensile (MPa)	Flatwise Compression (MPa)
		Max Load (Newtons)	Deflection at Max Load (inches)		
10	3.6	825	33	1.2	2.6
20	4.2	1924	16	1.2	2.6
30	4.7	3188	13	1.2	2.6

Mechanical test procedures to MIL-STD-401

Availability

Standard Dimensions

2400 x 1200mm

Panel Thickness

Made to order, minimum thickness 6mm

Safety

As with cutting operations on most materials, avoid inhalation and eye contact with machining dust. Wear protective equipment such as hearing protection and safety glasses during any cutting operations. Use machine guards. Wear gloves to avoid cuts. Wash hands before eating, drinking or smoking and after finishing work.

Ayres Composite Panels Pty Ltd

ABN 84 071 540 568

Australia Head Office and Manufacturing

25-27 Clune Street
Bayswater WA 6053, Australia
Tel: +61 (0) 8 9279 3426 Fax: +61 (0) 8 9279 6192
australia@ayrescom.com

USA Office and Manufacturing

5460 Business Parkway
Theodore Alabama 36582, USA
Tel: +1 251-653-0700 Fax: +1 251-653-7701
usa@ayrescom.com

Europe Office (Belgium)

Tel: +32 (0) 87 891245 Fax: +32 (0) 87 891246
europe@ayrescom.com

www.ayrescom.com

Lighten Up!

® Registered Trade Mark of Ayres Composite Panels

IMPORTANT All information is given in good faith but without acceptance of liability. Ayres Composite Panels reserves the right to alter specification without prior notice. It remains the responsibility of the customer to ensure the suitability of any product for the purposes intended. All sales are made subject to Ayres Composite Panels [standard terms and conditions of sale](#). Please direct all [enquiries here](#).