

AYRLITE® 2068

Non-Decorative Faced, Aluminum Honeycomb Panel



AYRES
Lightweight Panel Systems
www.ayrescom.com

DATA SHEET Issue 2

Description

AYRLITE 2068 is an aluminum honeycomb panel faced with non-decorative HPL laminate.

Panels are produced with the same finish laminate to both faces to ensure panel flatness.

AYRLITE 2068 is specifically designed to provide a lightweight panel substrate with high stiffness and strength, for the secondary bonding of veneers and other finishing materials.

Strain-hardened hexagonal cell aluminum honeycomb has optimum mechanical properties and is able to carry shear loads at significantly lower weight than foams or other core types.

Features

- Meets ISO 1182 for Non-Combustibility of aluminum honeycomb core.
- 1/4" cell size, aluminum honeycomb core.
- Panels are manufactured to any thickness, from 1/4" to 3".
- Aluminum honeycomb core meets the requirements of MIL-C-7438 salt fog anti-corrosion performance.
- Hot bonded adhesive process.
- High stiffness and strength.
- Low weight.
- Easy to fabricate.
- Wide selection of anodized aluminum assembly extrusions available.

Applications

- Wall linings.
- Doors.

- Tables.
- Furniture.
- Partitions.
- Cabinetry.
- Internal modules eg. galleys, toilets, etc.
- Ceilings.
- Bulkheads.


Fabrication

AYRLITE 2068 can be easily cut and drilled with standard tools, such as circular saws, routers etc. Components or complete interiors can be fabricated using Ayres Composite Panels' aluminum extrusions, cutters and polyurethane paste adhesives. Traditional tongue-and-groove (mortice and tenon) methods can also be used.

A DVD is available showing assembly techniques, contact Ayres Composite Panels for a copy.

Storage

NOTE: Unbalanced exposure of the panel faces to ambient moisture levels during transport and storage can induce bow in some panels; typically the top and/or bottom panel of a pack. To restore moisture balance and flatness, simply expose the concave face to the atmosphere overnight.

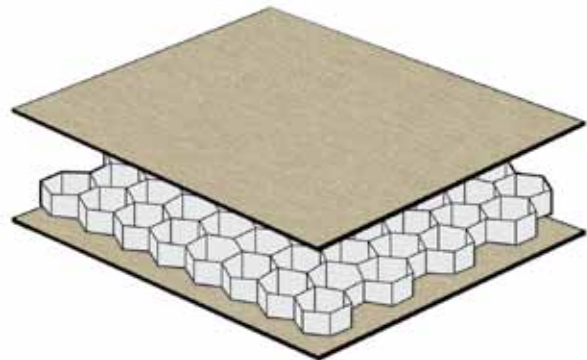

Physical and Mechanical Performance

Typical room temperature properties for 1mm (0.04") decorative laminate faced panels.

Thickness (inches)	Weight (lb/ft ²)	Long Beam		Flatwise Tensile (MPa)	Flatwise Compression (MPa)
		Max Load (Newtons)	Deflection at Max Load (inches)		
0.4	0.74	825	1.3	1.2	2.6
0.8	0.86	1924	0.63	1.2	2.6
1.2	0.96	3188	0.51	1.2	2.6

Mechanical test procedures to MIL-STD-401

Availability

Standard Dimensions
96" x 48"
Panel Thickness
Made to order, minimum thickness 1/4"

Safety

As with cutting operations on most materials, avoid inhalation and eye contact with machining dust. Wear protective equipment such as hearing protection and safety glasses during any cutting operations. Use machine guards. Wear gloves to avoid cuts. Wash hands before eating, drinking or smoking and after finishing work.

Ayres Composite Panels USA LLC

USA Office and Manufacturing
 5460 Business Parkway
 Theodore Alabama 36582, USA
 Tel: +1 251-653-0700 Fax: +1 251-653-7701
 usa@ayrescom.com

Australia Office and Manufacturing
 25-27 Clune Street
 Bayswater WA 6053, Australia
 Tel: +61 (0) 8 9279 3426 Fax: +61 (0) 8 9279 6192
 australia@ayrescom.com

Europe Office (Belgium)
 Tel: +32 (0) 87 891245 Fax: +32 (0) 87 891246
 europe@ayrescom.com

www.ayrescom.com

Lighten Up!

© Registered Trade Mark of Ayres Composite Panels
IMPORTANT All information is given in good faith but without acceptance of liability. Ayres Composite Panels reserves the right to alter specification without prior notice. It remains the responsibility of the customer to ensure the suitability of any product for the purposes intended. All sales are made subject to Ayres Composite Panels [standard terms and conditions of sale](#). Please direct all [enquiries here](#).